


40W LED COB TRACK LIGHT



New Products Coming Soon

UTK3023L

LED Light Engine

- Color Temperature 2700K-6000K
- CRI 80+
- 3 Step MacAdam (3 SDMC)
- Passive aluminum heat sink
- 50,000 hrs average rated life

Dimming

- Track Dimming
 - (ELV) reverse phase control dimmers. 120V only.
 - Dimmable 100 – 10%
- Canopy Dimming
 - ELV Dimming 120V
 - 0-10V Dimming 120V or 277V

Electrical System


- 120V/277V 50/60Hz input
- Overvoltage, overcurrent and short circuit protection with auto recovery
- MTBF > 100,000 hours

Compatibility

- This track luminaire is designed for use with the following track systems
 - Single Circuit / Single Neutral 120V
 - Two Circuit / Single Neutral 120V
 - Two Circuit / Two Neutral 120V
 - Two Circuit / Two Neutral 277V


High Performance LED

Dimensions


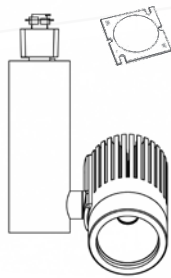


COB 40W


=

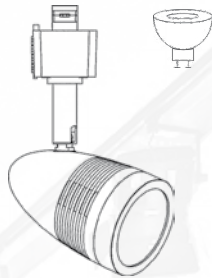


Halogen 200W

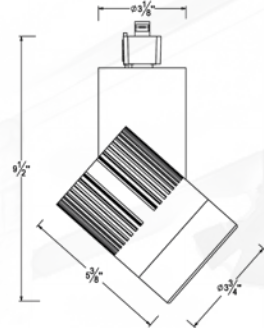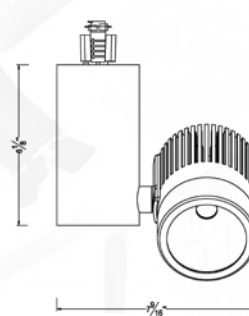

Luminous Intensity Distribution Diagram

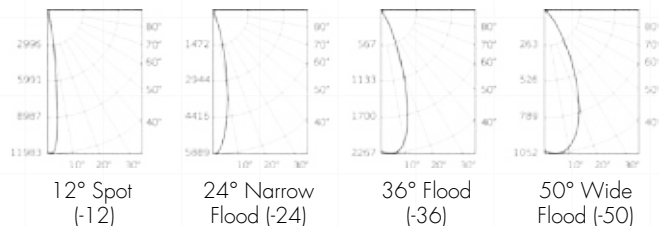

Color and Color Temperature

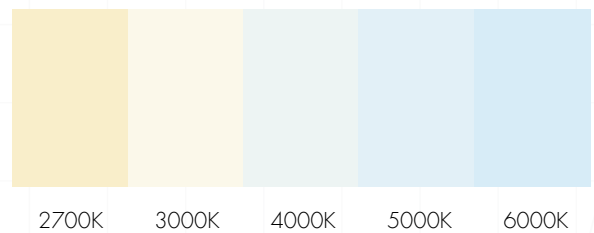


Optics

Customized



12° Spot
24° Narrow Flood
36° Flood
50° Flood

Available in Multiple Mounting Styles

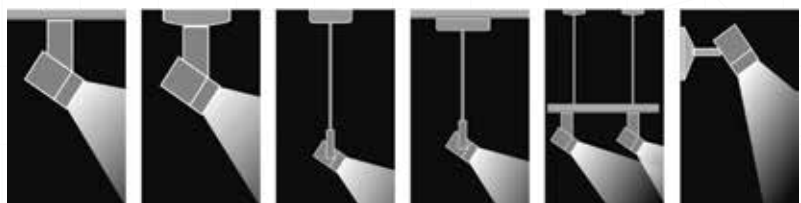

a - Track Mount
b - Canopy Mount
c - Canopy+Suspended Mount
d - Track+Suspended Mount
e - Canopy+Suspended+Track Mount
f - Wall Mount

Ordering Guide

UTK3023L					
Series	Beam Spread	Power Supply	LEDs Available	Color Temperature	Finish
40W COB Track Light	16° : 16° Spot 24° : 24° Narrow Flood 32° : 32° Flood 50° : 50° Wide Flood	ND120 : Non-Dimming 120V ND277 : Non-Dimming 277V D120 : 0-10V Dimming 120V D277 : 0-10V Dimming 277V	P : PHILIPS C : CREE E : EPISTAR S : SEOUL O : OSRAM	27K : 2700K 30K : 3000K 40K : 4000K 50K : 5000K 60K : 6000K	WH : White BK : Black SV : Silver SN : Satin Nickel